


Replacing Old Skylights?

How to correctly measure for replacement skylights:

E-Class and GS skylights are available in fixed and venting models.

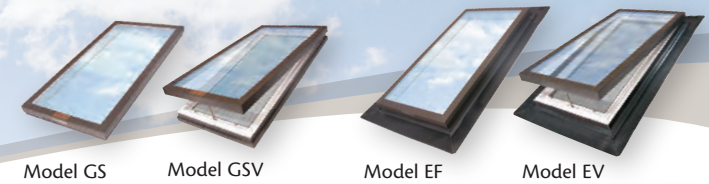

Is the skylight being replaced a Wasco skylight?


YES

For Wasco skylights, either curb mount or deck mount:

1. Measure the visible glass area on top of skylight.
2. Compare that glass area to the **VISIBLE GLASS** below. Use images at right to determine model. If there is no match in the chart, use your measurements to order a custom unit from Wasco.

NO

Is the competitor's skylight a curb mount?

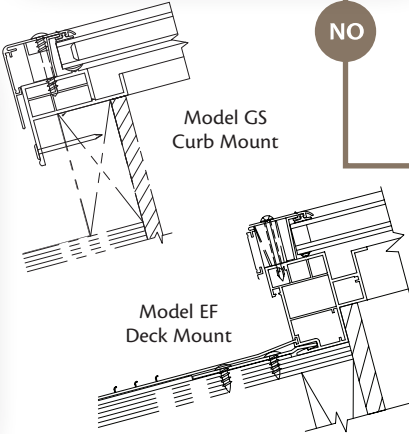

NO

YES

For a competitor's curb mount skylight, glass or dome:

1. Measure the length and width of the outside dimension of the "roof curb" (**O.D. CURB**) the skylight is mounted to.
2. Compare to standard size chart below for O.D. CURB and place order for your glass model GSXXXX. If there is no match in the chart, use your measurements to order a custom unit from Wasco.

For a competitor's deck mount skylight:

1. To determine the rough opening (**R.O.**), measure the length and width of finished drywall or trim of the light shaft closest to skylight. Then determine thickness of drywall/trim. Multiply the thickness of drywall/trim by two, and add to shaft dimensions.
2. Compare to standard size chart below for R.O. and place order for your model EFXXXX. If there is no match in the chart, use your measurements to order a custom unit from Wasco.

WASCO REPLACEMENT	
VISIBLE GLASS	EF/GS MODEL
22 5/8" x 22 5/8"	(EF)(GS)2222
22 5/8" x 30 5/8"	(EF)(GS)2230
22 5/8" x 38 5/8"	(EF)(GS)2238
22 5/8" x 46 5/8"	(EF)(GS) 2246
30 5/8" x 30 5/8"	(EF)(GS) 3030
30 5/8" x 46 5/8"	(EF)(GS) 3046
46 5/8" x 46 5/8"	(EF)(GS) 4646

COMPETITOR CURB MOUNT	
O.D. CURB	GS MODEL
25 1/2" x 25 1/2"	Model GS2222
25 1/2" x 33 1/2"	Model GS2230
25 1/2" x 41 1/2"	Model GS2238
25 1/2" x 49 1/2"	Model GS2246
33 1/2" x 33 1/2"	Model GS3030
33 1/2" x 49 1/2"	Model GS3046
49 1/2" x 49 1/2"	Model GS4646

COMPETITOR DECK MOUNT	
R.O.	EF MODEL
22 1/2" x 22 1/2"	Model EF2222
22 1/2" x 30 1/2"	Model EF2230
22 1/2" x 38 1/2"	Model EF2238
22 1/2" x 46 1/2"	Model EF2246
30 1/2" x 30 1/2"	Model EF3030
30 1/2" x 46 1/2"	Model EF3046
46 1/2" x 46 1/2"	Model EF4646

All Models: Minimum Roof Pitch: 3" in 12". Not for vertical applications. **GS Models:** For use with wood curb and flashing. Maximum 3 1/2" curb height. All curb mount GS models have a 3/8" space on each side to allow for flashing. **EF Models:** For use with thin roofing materials such as composition, slate, wood shingles and shakes up to 3/4" total lapped height.

NOTE: Specify dimension parallel to roof ridge first. For example, a measurement of 46 1/2" wide x 30 1/2" high would be a custom size model 4630, not a standard size 3046.

